
## ILLUSTRATION SHOWS TYPICAL PARTS ONLY. ORDER BY PART NUMBER. PARTS NOT LISTED ARE SUPPLIED BY OEM.

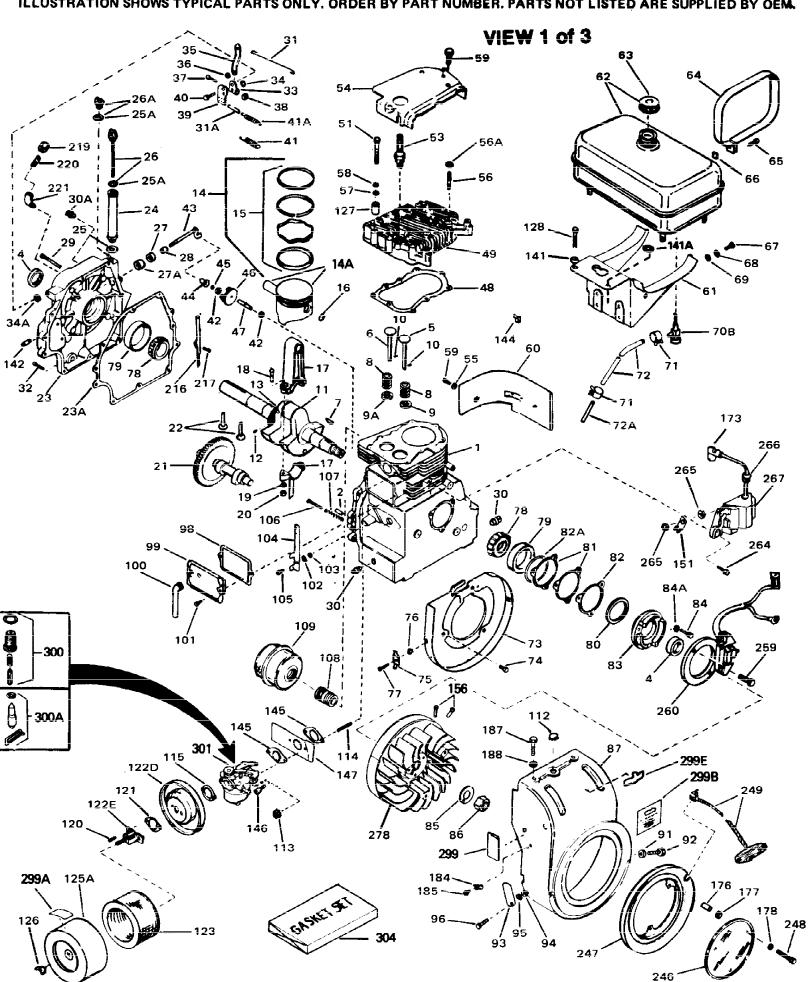


| Ref # | Part Number | Qty | Description                                    |
|-------|-------------|-----|--|
| 1     | 33039       | -   | Cylinder (Incl.2,4,30,47,119) (3-5/16 ")       |
| 2     | 27652       |     | Pin, Dowel                                     |
| 4     | 31950       |     | Seal, Oil                                      |
| 5     | 31940       |     | Intake Valve (Std.)                            |
|       | 31941       |     | Intake Valve (1/32" OS) (Incl. 9)              |
|       | 31942       |     | Exhaust Valve (Std.)                           |
|       | 31943       |     | Exhaust Valve (1/32" OS) (Incl. 9)             |
|       | 650592      |     | Key, Flywheel                                  |
|       | 31944       |     | Spring, Valve                                  |
|       | 31945       |     | Cap, Lower valve spring (Std.)                 |
|       | 31946       |     | Cap, Lower valve spring (1/32" OS)             |
|       | 31946       |     | Cap, Lower valve spring (1/32" OS)             |
|       | 31945       |     | Cap, Lower valve spring (Std.)                 |
|       | 20810       |     | Pin, Valve spring retainer                     |
|       | 33821B      |     | Crankshaft (Incl. 12, 13, 78 & 79)             |
|       | 29783       |     | Pin, Crankshaft gear                           |
|       | 31931       |     | Gear, Crankshaft                               |
|       | 32001C      |     | Piston & Pin Ass'y. (Std.)(Incl.16)(3 -5/16")  |
|       | 32002B      |     | Piston & Pin Ass'y. (.010" OS) (Incl. 16)      |
|       | 32003B      |     | Piston & Pin Ass'y. (.020" OS) (Incl. 16)      |
|       | 32619B      |     | Piston & Pin Ass'y. (.030" OS) (Incl. 16)      |
|       | 34508       |     | Piston, Pin & Ring Set (Std.) (3-5/16 " Bore)  |
|       | 34509       |     | Piston, Pin & Ring Set (old.) (0.0710 Bole)    |
|       | 34510       |     | Piston, Pin & Ring Set (.020" OS)              |
|       | 34850       |     | Piston, Pin & Ring Set (.030" OS)              |
|       | 34523       |     | Piston, Pin & Ring Set (.040" OS)              |
|       | 32620B      |     | Piston & Pin Ass'y. (.040" OS) (Incl. 16)      |
|       | 32004       |     | Ring Set (Std.) (3-5/16" Bore)                 |
|       | 32005       |     | Ring Set (.010" OS)                            |
|       | 32006       |     | Ring Set (.020" OS)                            |
|       | 32623       |     | Ring Set (.030" OS)                            |
|       | 32624       |     | Ring Set (.040" OS)                            |
|       | 32321       |     | Re-Ringing Set, Piston                         |
|       | 31919       |     | Ring, Piston pin retaining                     |
|       | 33093A      |     | Connecting Rod Ass'y.(Std.)(Incl.18, 19 & 20)  |
|       | 34383       |     | Connecting Rod Assy.(.010" US)(Incl.1 8,19,20) |
|       | 34384       |     | Connecting Rod Assy.(.020" US)(Incl.1 8,19,20) |
|       | 32077       |     | Bolt, Connecting rod                           |
|       | 26073       |     | Washer, Connecting rod                         |
|       | 28264       |     | Nut Assy., Lock                                |
|       | 33470       |     | Camshaft (MCR)                                 |
|       | 31939       |     | Lifter, Valve                                  |
|       | 31956A      |     | * Gasket, Cylinder cover                       |
|       | 33466       |     | Cover, Cylinder (Incl. 4 & 213)                |
|       | 29673       |     | * Gasket, Oil fill                             |
|       | 33069       |     | Dipstick (Incl. 25A)                           |
|       | 32426       |     | Spacer, Governor rod                           |
|       | 650492      |     | Screw, 1/4-20 x 2-1/4"                         |
|       | 31927       |     | ,  |
|       | 28483       |     | Oil Drain Plug Oil Drain Plug                  |
|       | 28483       |     | •  |
|       |             |     | Oil Drain Plug                                 |
|       | 31968       |     | Link, Governor                                 |
|       | 650451      |     | Screw, 1/4-20 x 1"                             |
|       | 31964       |     | Clamp, Governor lever                          |
| 34    | 29193       |     | Ring, Retaining                                |
|       |             |     |  |


| Ref # | Part Number    | Qty | Description  |
|-------|----------------|-----|--|
|       | 31963          |     | Lever, Governor adjusting                              |
|       | 650518         |     | Lockwasher   |
|       | 650544         |     | Screw, 10-24 x 7/8"                                    |
|       | 7975           |     | Nut, 10-24   |
|       | 31965          |     | Plate, Governor spring                                 |
|       | 30312          |     | Screw, 10-32 x 1/2"                                    |
|       | 31967          |     | Spring, Governor                                       |
|       | 30590A         |     | Washer, Flat   |
|       | 32425          |     | Rod Assy., Governor                                    |
|       | 31948          |     | Spool, Governor  |
|       | 29193          |     | Ring, Retaining  |
|       | 31947          |     | o o  |
|       | 31930          |     | Gear Assy., Governor<br>Shaft, Mechanical Governor     |
|       | 32000A         |     | •  |
|       |                |     | * Gasket, Cylinder head                                |
|       | 33034          |     | Head, Cylinder   |
|       | 650694A        |     | Screw, 5/16-18 x 2" (Use as required)                  |
|       | 650711         |     | Screw, 5/16-18 x 1-5/8" (Use as required)              |
|       | 650628A        |     | Screw, 5/16-18 x 2-3/8" (Use as required)              |
|       | 650695A        |     | Screw, 5/16-18 x 2-1/4" (Use as required)              |
|       | 650714         |     | Screw, 5/16-18 x 1-5/8" (Use as required)              |
|       | 650697A        |     | Screw, 5/16-18 x 2-1/2" (Use as required)              |
|       | 650692         |     | Screw, 5/16-18 x 1-3/4" (Use as required)              |
|       | 650603         |     | Screw, 5/16-18 x 5/8" (Use as require d)               |
|       | 33636          |     | Resistor Spark Plug (RJ-8C)                            |
|       | 34251          |     | Resistor Spark Plug (RJ-17LM)                          |
|       | 33035          |     | Cover, Cylinder head                                   |
|       | 28537          |     | Washer, Plain  |
|       | 650691         |     | Washer, Flat (Use as required)                         |
|       | 650690         |     | Washer, Belleville (Use as required)                   |
|       | 8274           |     | Washer, Lock (Use as required)                         |
|       | 650128         |     | Screw, 10-24 x 1/2"                                    |
|       | 31976          |     | Extension, Blower housing                              |
|       | 410144B        |     | Fuel Cap (White Plastic)(Std.)(As req uired)           |
| 63    | 34210          |     | Fuel Cap (Red Plastic) (Spurt resistant, High profile) |
|       |                |     | (Use as required)                                      |
| 67    | 650517         |     | Screw, 1/4-20 x 27/32" (Use as requir ed)              |
|       | 650561         |     | Screw, 1/4-20 x 5/8" (Use as required )                |
|       | 30063          |     | Screw, 1/4-20 x 3/6 (Use as required )                 |
|       | 792028         |     | •                |
|       |                |     | Screw, 5/16-18 x 7/8" (Use as require d)               |
|       | 26460<br>29774 |     | Clamp, Fuel line (Use as required)                     |
|       |                |     | Fuel Line (Braided) (8.25") (Use as required)          |
|       | 30705          |     | Fuel Line (Braided) (16") (Use as req uired)           |
|       | 30962          |     | Fuel Line (Braided) (32") (Use as required)            |
|       | 30965          |     | Fuel Line (Braided) (48") (Use as req uired)           |
|       | 32579          |     | Baffle, Blower housing                                 |
|       | 650561         |     | Screw, 1/4-20 x 5/8"                                   |
|       | 31932          |     | Bearing, Tapered roller                                |
|       | 31928          |     | Cup, Bearing   |
| 80    | 32031          |     | Spacer, Steel (.010" thick) NOTE: Determine the        |
|       |                |     | gap between the cover and the machined surface on      |
|       |                |     | the cylinder which can be from .001"up to .007" in     |
|       |                |     | which case no shim gaskets will be required. Use of    |
|       |                |     | gasket must be limited to a combined total of .010"    |
|       |                |     | thick. Steel spacersmust be used as required           |
|       |                |     |  |

| D ( "   |   |  |
|---|---|--|
|   | Part Number   | Qty Description  |
| 81  | 31971   | * Gasket, Shim (.004/.005 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req  |
| 82  | 31972   | * Gasket, Shim (.005/.007 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req  |
|   | 32599<br>32577  | "O" Ring Cover, Cylinder NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required to eliminat   |
| 84<br>85<br>86<br>87<br>91<br>92<br>95<br>96<br>98<br>99<br>100<br>101<br>102<br>103<br>104<br>105<br>106<br>107<br>108<br>112<br>115<br>120<br>121<br>125A<br>128<br>128 | 650679 792028 650666 650594 33044A 8274 650595 8274 650595 31958 31957 35350 650128 28558 31966 31984A 650597 650591 33099 33853 33038 27272 650399 30767 32810 650513 650713 650429 792028 | Lockwasher, 5/16" (Use as required) Screw, 5/16-18 x 7/8" Washer, Lock Nut, Flywheel, 3/4-16 Blower Hsg. (Incl.73) (For electric s tarter) Washer, Lock Screw, 5/16-24 x 3/8" Washer, Lock Screw, 5/16-24 x 3/8" * Gasket, Breather Breather Assy. Tube, Breather Screw, 10-24 x 1/2" Washer, Wave Bushing, Control lever Lever, Control Screw, 10-24 x 5/8" Screw, 10-24 x 2" Spring Nipple, Exhaust pipe Plug, Button (Use as required) * Gasket, Air cleaner Screw, 10-32 x 5/8" Spacer, Air cleaner Cover, Air cleaner Cover, Air cleaner Nut, Wing Screw, 5/16-18 x 5/8" (Use as require d) Screw, 5/16-18 x 3/4" (Use as require d) Screw, 5/16-18 x 7/8" (Use as require d) |
| 141<br>145<br>146<br>147  | 8274<br>26073<br>33263<br>650451<br>34061<br>610908   | Lockwasher, Split (Use as required) Washer, Flat (Use as required) * Gasket, Carburetor Screw, 1/4-20 x 1" Baffle, Air Terminal, Female  |
| 131   | 010000  | rominal, romaio  |


| Ref # | Part Number | Qty | Description   |
|-------|-------------|-----|---|
| 156   | 730201      |     | Trigger Pin Kit (Use as required)   |
| 173   | 610118      |     | Cover, Spark plug (Use as required)   |
| 176   | 32426       |     | Spacer, Screen  |
| 177   | 650675      |     | Washer, Flat 1/4"   |
| 177   | 8345        |     | Washer, 1/4 plain (Use as required)   |
| 178   | 27070       |     | Washer, Lock 1/4 E.T. (Use as require d)  |
| 178   | 650675      |     | Washer, Flat 1/4 (Use as required)  |
| 184   | 27793       |     | Clip, Conduit   |
| 185   | 28942       |     | Screw, 10-32 x 3/8"   |
| 187   | 650713      |     | Screw, 5/16-18 x 5/8"   |
| 188   | 26073       |     | Washer, Flat  |
| 216   | 33467       |     | Tube, Extension, Oil fill   |
| 217   | 650744      |     | Screw, 10-24 x 7/8"   |
| 246   | 33776       |     | Screen, Starter pulley  |
| 248   | 650670      |     | Screw, 1/4-20 x 3/4"  |
| 249   | 32046       |     | Rope Assy., Starter (Use as required)   |
| 264   | 650661      |     | Screw, 1/4-20 x 3/4"  |
| 265   | 610408      |     | Nut, Hex  |
| 266   | 610750      |     | Grommet, Lead wire  |
| 267   | 610906      |     | Solid State Magneto (Incl.151,173,265,266)(20 Amp)                              |
| 278   | 610901      |     | Solid State Flywheel  |
| 299B  | 550223      |     | Decal, Name   |
|       | 34346       |     | Decal, Instruction  |
|       | 631725      |     | Inlet Needle, Seat & Clip Assy.   |
| 301   | 631969      |     | Carburetor (Incl. 145) (Refer to Division 5, Section A, page 150 for breakdown) |
| 304   | 33237A      |     | * Gasket Set (Incl. items marked *)   |

## This illustration may not depict actual equipment and is for reference only! **VIEW 2 of 3** 132 133 175 135 129 262 268 257A 270A 260A 255 235 252 275 299C 165

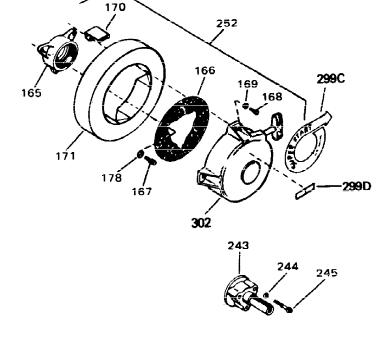



| Ref # | Part Number | Qty | Description  |
|-------|-------------|-----|--|
| 178   | 27070       |     | Washer, Lock 1/4 E.T. (Use as require d)             |
| 178   | 650675      |     | Washer, Flat 1/4 (Use as required)                   |
| 180   | 650701      |     | Screw, 8-18 x 7/16" (Use as required)                |
| 222   | 792028      |     | Screw, 5/16-18 x 7/8" (Use w/32817 st r.motor)       |
| 222   | 650781      |     | Screw,5/16-18 x 11/16"(Use w/33835 st r.motor)       |
| 235   | 34276       |     | Plate, Cover (Use as required to cover regulator     |
|       |             |     | mounting hole in blower housing)                     |
| 236   | 650736      |     | Screw, 10-16 x 3/8" (Use as required)                |
| 252   | 730134      |     | Rewind Starter Kit (Incl. 165, 166, 167, 168, 169 &  |
|       |             |     | 291) (Use as required)                               |
| 253   | 33018       |     | Harness Assy., Adapter (Use as requir ed)            |
| 254A  | 610902      |     | Alternator Coil (20 Amp)(Incl.256,257,258)           |
| 255   | 650521      |     | Screw, 10-32 x 1-1/8"                                |
| 256   | 610905      |     | Terminal   |
|       | 610904      |     | Terminal   |
| 257B  | 610824      |     | Flat Connector (Female terminals) (As req.)          |
|       | 610903      |     | Connector, Flat                                      |
|       | 610750      |     | Grommet, Lead wire                                   |
|       | 610996      |     | Regulator (20 Amp) (Incl. 270 thru 27 4)             |
|       | 30063       |     | Screw, 1/4-20 x 1/2"                                 |
|       | 610921      |     | Connector  |
|       | 610990      |     | Connector, Male                                      |
|       | 610992      |     | Terminal, Female                                     |
|       | 610989      |     | Terminal, Female                                     |
|       | 610992      |     | Terminal, Female                                     |
|       | 610991      |     | Terminal, Female                                     |
|       | 730198      |     | Starter Switch Kit(Incl. 287-298) (As req.)          |
| 303   | 33835       |     | Electric Starter Motor (12 Volt) NOTE: The 32817     |
|       |             |     | and 33835 starter motors are used interchangeably    |
|       |             |     | on the se models. Refer to service numberstamped     |
|       |             |     | on end cap of motor, or on decal for identification. |
|       |             |     | Refer to Division 5, Section D for breakdown.        |

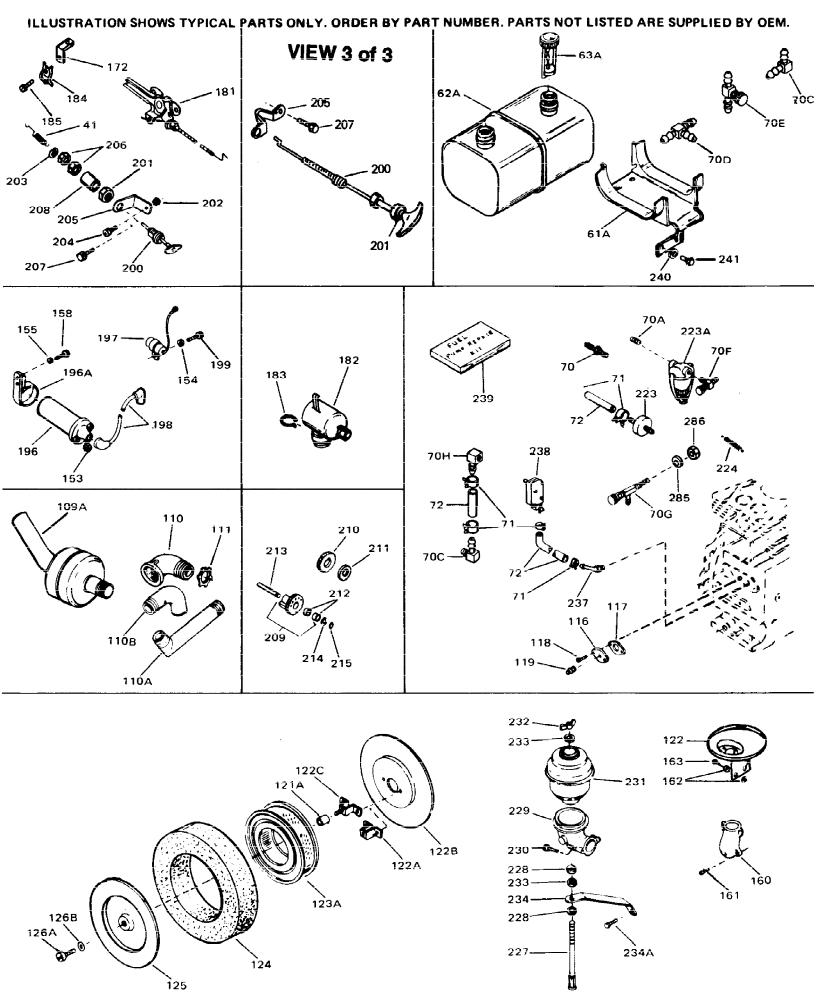

| Ref # | Part Number | Qty | Description   |
|-------|-------------|-----|---|
| 41    | 31967       |     | Spring, Governor                                      |
| 71    | 26460       |     | Clamp, Fuel line (Use as required)                    |
| 72    | 29774       |     | Fuel Line (Braided) (8.25") (Use as r equired)        |
| 72    | 30705       |     | Fuel Line (Braided) (16") (Use as req uired)          |
| 72    | 30962       |     | Fuel Line (Braided) (32") (Use as req uired)          |
| 72    | 30965       |     | Fuel Line (Braided) (48") (Use as req uired)          |
| 119   | 28534       |     | Pipe Plug, 1/8-27 (Use as required)                   |
| 119   | 9556        |     | Plug, Pipe, 1/8-27 (Use as required)                  |
| 122C  | 32907B      |     | Bracket, Air cleaner                                  |
| 122B  | 34065       |     | Bracket, Air cleaner                                  |
| 123A  | 32008       |     | Element, Air cleaner                                  |
| 184   | 27793       |     | Clip, Conduit   |
| 185   | 28942       |     | Screw, 10-32 x 3/8"                                   |
| 209   | 33964       |     | Weight Assy., Counterbalance (Helical teeth) (Incl. 2 |
|       |             |     | of 212)   |
| 210   | 33963       |     | Gear, Counterbalance Weight                           |
| 211   | 33499       |     | Spacer  |
| 212   | 33501       |     | Bearing, Needle                                       |
| 213   | 33502       |     | Shaft, Counterbalance                                 |
| 214   | 33503       |     | Washer, Thrust  |
| 215   | 792017      |     | Ring, Retaining                                       |
| 237   | 32958       |     | Fitting, Fuel   |
| 238   | 32959       |     | Fuel Pump, Impulse                                    |
| 239   | 33010       |     | Repair Kit, Impulse fuel pump                         |