
ILLUSTRATION SHOWS TYPICAL PARTS ONLY. ORDER BY PART NUMBER. PARTS NOT LISTED ARE SUPPLIED BY OEM.

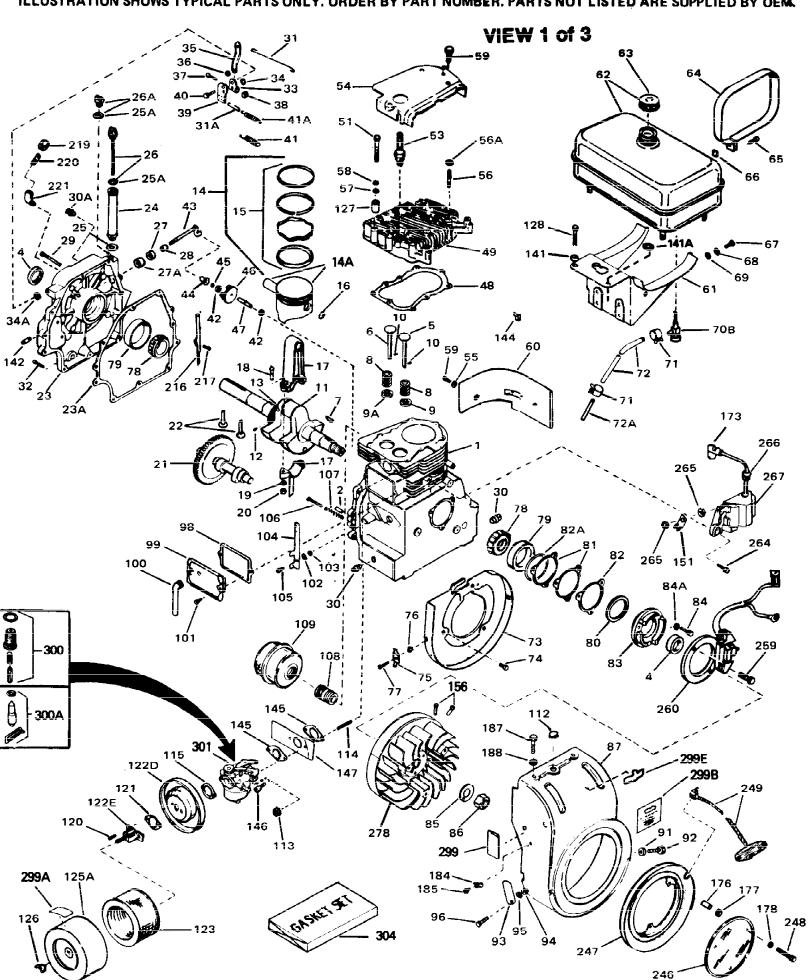


| Ref # | Part Number | Qty | Description |
|-------|-------------|-----|--|
| 1 | 33042 | | Cylinder (Incl. 2, 4, 30 & 47) (3-1/2 " Bore) |
| 2 | 27652 | | Pin, Dowel |
| 4 | 31950 | | Seal, Oil |
| | 31940 | | Intake Valve (Std.) |
| | 31941 | | Intake Valve (1/32" OS) (Incl. 9) |
| | 31942 | | Exhaust Valve (Std.) |
| | | | , |
| | 31943 | | Exhaust Valve (1/32" OS) (Incl. 9) |
| | 650592 | | Key, Flywheel |
| | 31944 | | Spring, Valve |
| | 31945 | | Cap, Lower valve spring (Std.) |
| | 31946 | | Cap, Lower valve spring (1/32" OS) |
| 9 | 31946 | | Cap, Lower valve spring (1/32" OS) |
| 9 | 31945 | | Cap, Lower valve spring (Std.) |
| 10 | 20810 | | Pin, Valve spring retainer |
| 11 | 32291B | | Crankshaft (Incl. 12, 13, 17, 78 & 79) |
| 12 | 29783 | | Pin, Crankshaft gear |
| | 31931 | | Gear, Crankshaft |
| | 34511 | | Piston, Pin & Ring Set (Std.) (3-1/2" Bore) |
| | 34512 | | Piston, Pin & Ring Set (.010" OS) |
| | 34513 | | Piston, Pin & Ring Set (.020" OS) |
| | | | |
| | 34524 | | Piston, Pin & Ring Set (.030" OS) |
| | 34525 | | Piston, Pin & Ring Set (.040" OS) |
| | 32238B | | Piston & Pin Ass'y. (Std.)(Incl.16)(3 -1/2") |
| | 32239B | | Piston & Pin Ass'y. (.010" OS) (Incl. 16) |
| | 32240B | | Piston & Pin Ass'y. (.020" OS) (Incl. 16) |
| | 32621B | | Piston & Pin Ass'y. (.030" OS) (Incl. 16) |
| 14A | 32622B | | Piston & Pin Ass'y. (.040" OS) (Incl. 16) |
| 15 | 32241 | | Ring Set (Std.) (3-1/2" Bore) |
| 15 | 32242 | | Ring Set (.010" OS) |
| 15 | 32243 | | Ring Set (.020" OS) |
| 15 | 32625 | | Ring Set (.030" OS) |
| | 32626 | | Ring Set (.040" OS) |
| | 32336 | | Re-Ringing Set, Piston |
| | 31919 | | Ring, Piston pin retaining |
| | 33093A | | Connecting Rod Ass'y.(Std.)(Incl.18, 19 & 20) |
| | 34383 | | Connecting Rod Assy.(.010" US)(Incl.1 8,19,20) |
| | 34384 | | |
| | | | Connecting Rod Assy.(.020" US)(Incl.1 8,19,20) |
| | 32077 | | Bolt, Connecting rod |
| | 26073 | | Washer, Connecting rod |
| | 28264 | | Nut Assy., Lock |
| | 32150 | | Camshaft (MCR) |
| | 31939 | | Lifter, Valve |
| | 32580A | | Cover, Cylinder (Incl. 4, 28, 30, 34, & 43) |
| 23A | 31956A | | * Gasket, Cylinder cover |
| 24 | 31985 | | Oil Fill Tube |
| 25 | 29673 | | * Gasket, Oil fill tube |
| 25A | 29673 | | * Gasket, Oil fill |
| | 33070 | | Dipstick (Incl. 25A) |
| | 32426 | | Spacer, Governor rod |
| | 650588 | | Screw, 1/4-20 x 2" |
| | 31927 | | Oil Drain Plug |
| | | | • |
| | 31968 | | Link, Governor |
| | 650451 | | Screw, 1/4-20 x 1" |
| | 31964 | | Clamp, Governor lever |
| 34 | 29193 | | Ring, Retaining |
| | | | |


| | Part Number | Qty | Description |
|----|-------------|-----|--|
| | 31963 | | Lever, Governor adjusting |
| | 650518 | | Lockwasher |
| | 650544 | | Screw, 10-24 x 7/8" |
| | 7975 | | Nut, 10-24 |
| | 31965 | | Plate, Governor spring |
| | 30312 | | Screw, 10-32 x 1/2" |
| | 31967 | | Spring, Governor |
| | 30590A | | Washer, Flat |
| | 32425 | | Rod Assy., Governor |
| | 31948 | | Spool, Governor |
| | 29193 | | Ring, Retaining |
| 46 | 31947 | | Gear Assy., Governor |
| 47 | 31930 | | Shaft, Mechanical Governor |
| 48 | 32246A | | * Gasket, Cylinder head |
| 49 | 33034 | | Head, Cylinder |
| 51 | 650694A | | Screw, 5/16-18 x 2" (Use as required) |
| 51 | 650711 | | Screw, 5/16-18 x 1-5/8" (Use as required) |
| 51 | 650628A | | Screw, 5/16-18 x 2-3/8" (Use as required) |
| 51 | 650695A | | Screw, 5/16-18 x 2-1/4" (Use as required) |
| 51 | 650714 | | Screw, 5/16-18 x 1-5/8" (Use as required) |
| 51 | 650697A | | Screw, 5/16-18 x 2-1/2" (Use as required) |
| 51 | 650692 | | Screw, 5/16-18 x 1-3/4" (Use as required) |
| | 650603 | | Screw, 5/16-18 x 5/8" (Use as require d) |
| | 33636 | | Resistor Spark Plug (RJ-8C) |
| | 34251 | | Resistor Spark Plug (RJ-17LM) |
| | 33035 | | Cover, Cylinder head |
| | 28537 | | Washer, Plain |
| | 650691 | | Washer, Flat (Use as required) |
| | 650690 | | Washer, Belleville (Use as required) |
| | 8274 | | Washer, Lock (Use as required) |
| | 650128 | | Screw, 10-24 x 1/2" |
| | 31976 | | Extension, Blower housing |
| | 31978 | | Bracket, Fuel tank |
| | 410144B | | Fuel Cap (White Plastic)(Std.)(As req uired) |
| | 34210 | | Fuel Cap (Red Plastic) (Spurt resistant, High profile) |
| 00 | 0.210 | | (Use as required) |
| | | | |
| | 31979 | | Strap, Fuel tank |
| | 650451 | | Screw, 1/4-20 x 1" |
| | 650456 | | Nut, Flange whiz-lock, 1/4-20 |
| | 650517 | | Screw, 1/4-20 x 27/32" (Use as requir ed) |
| 67 | 650561 | | Screw, 1/4-20 x 5/8" (Use as required) |
| 67 | 30063 | | Screw, 1/4-20 x 1/2" (Use as required) |
| 67 | 792028 | | Screw, 5/16-18 x 7/8" (Use as require d) |
| 68 | 8345 | | Washer, Flat |
| 69 | 8303 | | Lockwasher |
| 71 | 26460 | | Clamp, Fuel line (Use as required) |
| 72 | 29774 | | Fuel Line (Braided) (8.25") (Use as r equired) |
| 72 | 30705 | | Fuel Line (Braided) (16") (Use as req uired) |
| 72 | 30962 | | Fuel Line (Braided) (32") (Use as req uired) |
| 72 | 30965 | | Fuel Line (Braided) (48") (Use as req uired) |
| 73 | 32579 | | Baffle, Blower housing |
| 74 | 650561 | | Screw, 1/4-20 x 5/8" |
| 78 | 31932 | | Bearing, Tapered roller |
| 79 | 31928 | | Cup, Bearing |
| _ | | | • |

| | Part Number 32031 | Qty | Description Spacer, Steel (.010" thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required |
|---|--|-----|---|
| 81 | 31971 | | * Gasket, Shim (.004/.005 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req |
| 82 | 31972 | | * Gasket, Shim (.005/.007 thick) NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as req |
| | 32599 32577 | | "O" Ring Cover, Cylinder NOTE: Determine the gap between the cover and the machined surface on the cylinder which can be from .001"up to .007" in which case no shim gaskets will be required. Use of gasket must be limited to a combined total of .010" thick. Steel spacersmust be used as required to eliminat |
| 84A 85 86 87 91 92 95 96 98 99 100 101 102 103 104 105 106 107 108 109 112 113 114 115 120 121 | 792028 650679 650666 650594 33044A 8274 650595 8274 650624 31958 31957 35350 650128 28558 31966 31984A 650597 650591 33099 32042 32043B 33038 29752 650587 27272 650399 30767 32812 | | Screw, 5/16-18 x 7/8" Lockwasher, 5/16" (Use as required) Washer, Lock Nut, Flywheel, 3/4-16 Blower Hsg. (Incl.73) (For electric s tarter) Washer, Lock Screw, 5/16-24 x 3/8" Washer, Lock Screw, 5/16-24 x 9/16" * Gasket, Breather Breather Assy. Tube, Breather Screw, 10-24 x 1/2" Washer, Wave Bushing, Control lever Lever, Control Screw, 10-24 x 5/8" Screw, 10-24 x 2" Spring Nipple, Exhaust pipe Muffler Plug, Button (Use as required) Nut & Lockwasher Assy. Stud, Carburetor * Gasket, Air cleaner Screw, 10-32 x 5/8" Spacer, Air cleaner Bracket, Air cleaner |

| Ref # | Part Number | Qty | Description |
|-------|-------------|-----|---|
| 125A | 32810 | | Cover, Air cleaner |
| 128 | 650713 | | Screw, 5/16-18 x 5/8" (Use as require d) |
| 128 | 650429 | | Screw, 5/16-18 x 3/4" (Use as require d) |
| 128 | 792028 | | Screw, 5/16-18 x 7/8" (Use as require d) |
| 141A | 8274 | | Lockwasher, Split (Use as required) |
| 141 | 26073 | | Washer, Flat (Use as required) |
| 145 | 31960 | | * Gasket, Carburetor |
| 147 | 31959 | | Baffle, Air |
| 151 | 33356 | | Terminal, Ground |
| 156 | 730201 | | Trigger Pin Kit (Use as required) |
| 173 | 610118 | | Cover, Spark plug (Use as required) |
| 176 | 31992 | | Spacer, Screen |
| 177 | 8345 | | Washer, 1/4 plain (Use as required) |
| 178 | 27070 | | Washer, Lock 1/4 E.T. (Use as require d) |
| 178 | 650675 | | Washer, Flat 1/4 (Use as required) |
| 184 | 27793 | | Clip, Conduit |
| 185 | 28942 | | Screw, 10-32 x 3/8" |
| 187 | 650713 | | Screw, 5/16-18 x 5/8" |
| 188 | 26073 | | Washer, Flat |
| 246 | 33776 | | Screen, Starter pulley |
| 247 | 31980 | | Pulley, Starter |
| 248 | 650680 | | Screw, 1/4-20 x 1-1/2" |
| 249 | 32046 | | Rope Assy., Starter (Use as required) |
| 264 | 650661 | | Screw, 1/4-20 x 3/4" |
| 265 | 610408 | | Nut, Hex |
| 266 | 610750 | | Grommet, Lead wire |
| 267 | 610748 | | Solid State Magneto (Incl.151,173,265 ,266) |
| 278 | 610746 | | Solid State Flywheel |
| 299B | 550223 | | Decal, Name |
| 299B | 32676 | | Decal, Solid State |
| 299 | 34346 | | Decal, Instruction |
| 299A | 31752 | | Decal, Air cleaner |
| 300 | 32255A | | Valve, Seat, Spring & Gasket Assy. |
| 301 | 631533 | | Carburetor (Incl. 145) (Refer to Division 5, Section A, |
| | | | page 94 for breakdown) |
| 204 | 33237A | | * Gasket Set (Incl. items marked *) |
| 304 | 33231A | | Gasket Set (IIIG. Iteliis IIIalkeu) |

This illustration may not depict actual equipment and is for reference only! **VIEW 2 of 3** 132 133 175 135 129 262 268 257A 270A 260A 255 235

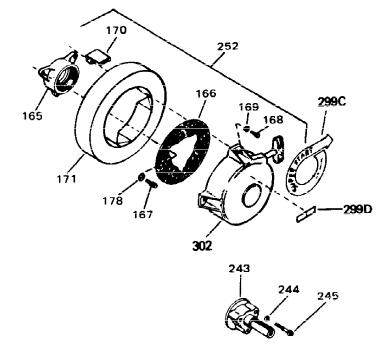



| Ref # | Part Number | Qty | Description |
|-------|-------------|-----|--|
| 178 | 27070 | | Washer, Lock 1/4 E.T. (Use as require d) |
| 178 | 650675 | | Washer, Flat 1/4 (Use as required) |
| 180 | 650701 | | Screw, 8-18 x 7/16" (Use as required) |
| 222 | 792028 | | Screw, 5/16-18 x 7/8" (Use w/32817 st r.motor) |
| | 650781 | | Screw,5/16-18 x 11/16"(Use w/33835 st r.motor) |
| 235 | 34276 | | Plate, Cover (Use as required to cover regulator mounting hole in blower housing) |
| 236 | 650736 | | Screw, 10-16 x 3/8" (Use as required) |
| 252 | 730134 | | Rewind Starter Kit (Incl. 165, 166, 167, 168, 169 & 291) (Use as required) |
| 253 | 33018 | | Harness Assy., Adapter (Use as requir ed) |
| | 610761 | | Alternator Coil (Solid State) (10 Amp) (Incl. Nos. 253, 256 & 257A) |
| 255 | 650416 | | Screw, 10-32 x 1" |
| 256 | 610922 | | Terminal, Female |
| 257B | 610824 | | Flat Connector (Female terminals) (As req.) |
| 257A | 610819 | | Connector, Pyramid (For female termin als) |
| | 610750 | | Grommet, Lead wire |
| | 610749 | | Solid State Regulator (10 Amp) |
| | 730198 | | Starter Switch Kit(Incl. 287-298) (As req.) |
| 303 | 33835 | | Electric Starter Motor (12 Volt) NOTE: The 32817 and 33835 starter motors are used interchangeably on the se models. Refer to service numberstamped on end cap of motor, or on decal for identification. Refer to Division 5, Section D for breakdown. |



| Ref # | Part Number | Qty | Description |
|-------|-------------|-----|--|
| 41 | 31967 | | Spring, Governor |
| 70 | 29634 | | Fitting, Fuel line |
| 71 | 26460 | | Clamp, Fuel line (Use as required) |
| 72 | 29774 | | Fuel Line (Braided) (8.25") (Use as r equired) |
| 72 | 30705 | | Fuel Line (Braided) (16") (Use as req uired) |
| 72 | 30962 | | Fuel Line (Braided) (32") (Use as req uired) |
| 72 | 30965 | | Fuel Line (Braided) (48") (Use as req uired) |
| 119 | 28534 | | Pipe Plug, 1/8-27 (Use as required) |
| 119 | 9556 | | Plug, Pipe, 1/8-27 (Use as required) |
| 122A | 32811 | | Bracket, Air cleaner |
| 123A | 32008 | | Element, Air cleaner |
| 126A | 30513 | | Screw & Lockwasher |
| 172 | 31990 | | Bracket, Choke control |
| 184 | 27793 | | Clip, Conduit |
| 185 | 28942 | | Screw, 10-32 x 3/8" |